


Save resources and extend seal life. The Esko Dual Flow (EDF) flowmeter is the ideal partner for applications requiring uninterrupted seal water flow for cooling and lubrication. The EDF model is compatible with all seal types. Modular construction and various options make this flowmeter flexible and versatile.

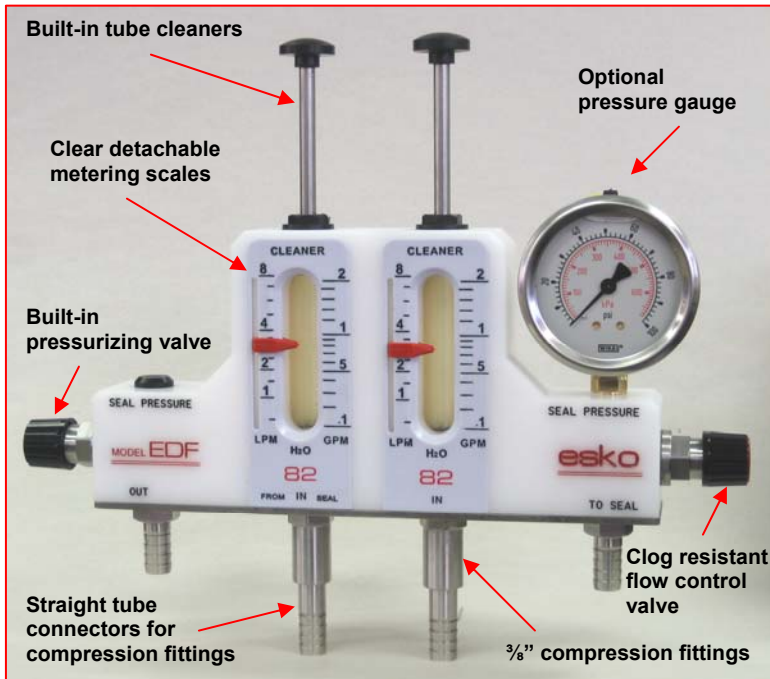

Applications


- Seal flush systems
- Single and double mechanical seals
- Gland packings

Options

- Glass tube
- Inductive adjustable alarm
- Pressure gauge
- Floor mounting stand
- Hose barb connectors, straight tube connectors, compression fittings, or NPT threads

Features

- Reliable operation
- Solid construction
- Excellent corrosion and heat resistance
- Clear DETACHABLE metering scale
- Built-in pressurizing valve
- Alarm ready
- Clog resistant flow control valve
- 6 connection options
- Mounting bracket
- Built-in tube cleaner
- PSU (polysulphone) tube
- Easy access to the flow meter fittings as all connectors are in a straight line

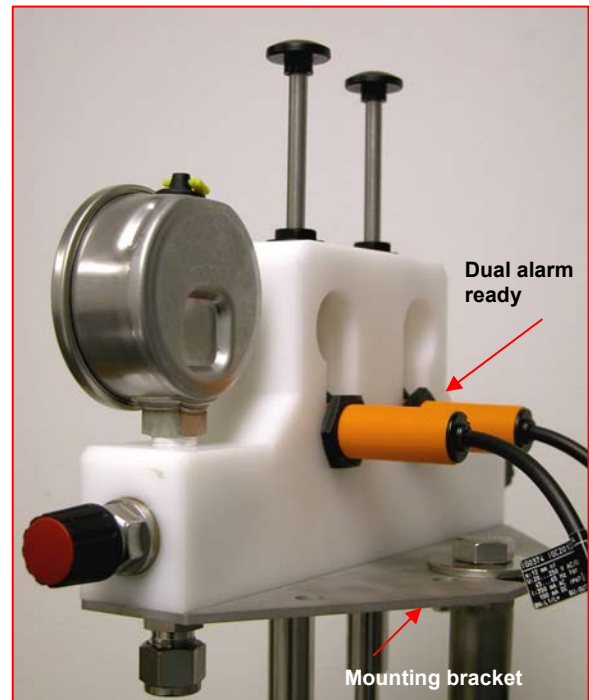

Technical Specifications

Body	Standard Delrin (POM) or Kynar
Metering tube	Polysulphone (PSU)
Metallic parts	AISI 316 and AISI 304
Seals	Viton
Max. pressure	Grilamid TR55 435 psi @ 120°F
Max. temperature	Grilamid TR55 POM body/PSU tube: 212°F (100°C) Kynar body/PSU tube: 266°F (130°C)
Connections	Hose barb, straight tube, compression fitting, or NPT threads
Weight	5 lbs / 2.3 kg c/w pressure gauge, all fittings and packaging

